


SPECIFICATIONS — MARINE VALVES JIS STANDARD

BRONZE EMERGENCY SHUT OFF VALVE (MARINE TYPE)

MATERIALS TABLE

ITEM NO	NAME OF PART	MATERIAL
1	BODY	BC6
2	BONNET	BC6
3	DISC	BC6
4	VALVE SEAT	BC6
5	STEM	C3771BD OR BE
6	OPERATING SPINDLE	SS403
7	GASKET	non-asbestos
8	HANDWHEEL	FC200

TYPE OF TEST	TYPE OF VALVES	
	F7399 5K	F7399 10K
WORKING PRESSURE	5 kg/cm ² (0.49Mpa)	10 kg/cm ² (0.98Mpa)
BODY TEST	7 kg/cm ² (0.686Mpa)	7 kg/cm ² (0.686Mpa)
SEAT TEST	2 kg/cm ² (0.196Mpa)	2 kg/cm ² (0.196Mpa)

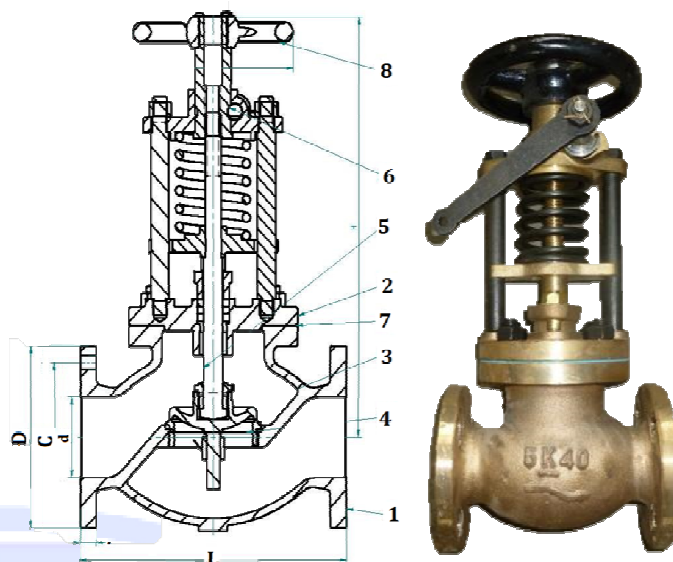

SIZE TABLE

F7399 FUEL OIL TANK 5K EMERGENCY SHUT-OFF VALVES

DN	d	L	D	C	NO	h	t	H	D2
15	25	120	80	60	4	12	9	268	120
20	25	120	85	65	4	12	10	268	120
25	25	120	95	75	4	12	10	268	120
40	40	160	120	95	4	15	12	302	140
50	50	210	130	105	4	15	14	316	140
65	65	250	155	130	4	15	14	391	180
80	80	280	180	145	4	19	18	416	180

F7399 FUEL OIL TANK 10K EMERGENCY SHUT-OFF VALVES

DN	d	L	D	C	NO	h	t	H	D2
15	25	130	95	70	4	15	12	268	120
20	25	130	100	75	4	15	14	268	120
25	25	130	125	90	4	19	14	268	120
40	40	170	140	105	4	19	16	302	140
50	50	220	155	120	4	19	16	316	140
65	65	270	175	140	4	19	18	391	180
80	80	300	185	150	8	19	18	416	180