


SPECIFICATIONS — MARINE VALVES JIS STANDARD

BRONZE SELF CLOSING DRAIN VALVE (MARINE TYPE)

MATERIALS TABLE

ITEM NO	NAME OF PART	MATERIAL
1	BODY	BC6
2	BONNET	BC6
3	DISC	BC6
4	STEM	C3371BD OR BE
5	HANDLE	SS400

TYPE OF TEST	TYPE OF VALVES	
	U7398 (5/10K)	F7398 (5/10K)
WORKING PRESSURE	5 kg/cm ² (0.49Mpa)	10 kg/cm ² (0.98Mpa)
BODY TEST	1.5 kg/cm ² (0.147Mpa)	1.5 kg/cm ² (0.147Mpa)
SEAT TEST	1.1 kg/cm ² (0.108Mpa)	1.1 kg/cm ² (0.108Mpa)

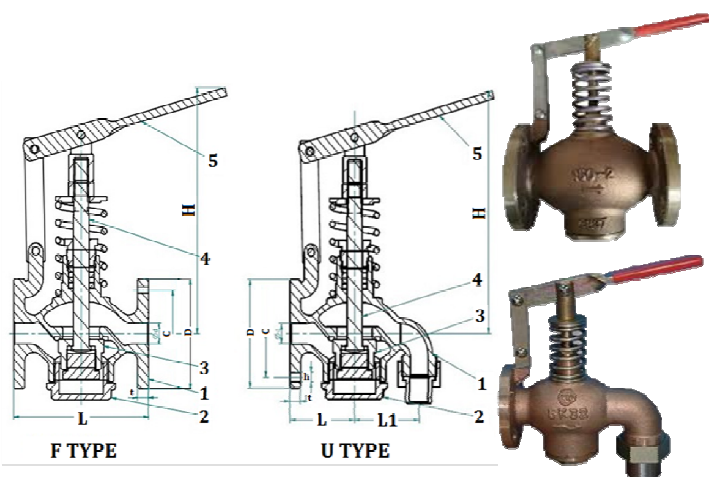

SIZE TABLE

U7398 SHIPBUILDING-FUEL OIL TANK SELF-CLOSING DRAIN VALVES

DN	d	L	D	C	NO	h	t	H	L1
5K15U	15	55	80	60	4	12	9	179	55
10K15U	15	55	95	70	4	15	12	179	55
5K20U	25	65	85	65	4	12	10	187	65
10K20U	25	65	100	75	4	15	14	187	65
5K25U	25	65	95	75	4	12	10	187	65
10K25U	25	65	125	90	4	19	14	187	65
5K40U	40	90	120	95	4	15	12	229	100
5K65U	65	135	155	130	4	15	14	252	160

F7398 SHIPBUILDING-FUEL OIL TANK SELF-CLOSING DRAIN VALVES

DN	d	L	D	C	NO	h	t	H
5K15F	15	110	80	60	4	12	9	179
5K20F	25	130	85	65	4	12	10	187
10K20F	25	130	100	75	4	15	14	187
5K240F	40	180	120	95	4	15	12	229