


SPECIFICATIONS — MARINE VALVES JIS STANDARD

BRONZE Y-STRAINER (MARINE TYPE)

MATERIALS TABLE

ITEM NO	NAME OF PART	MATERIAL
1	BODY	BC6
2	BONNET	BC6
3	STRAINER	SUS304
4	GASKET	non-asbestos

TYPE OF TEST	TYPE OF VALVES	
	F7220Q 5K	F7220Q 10K
WORKING PRESSURE	5 kg/cm ² (0.49Mpa)	10 kg/cm ² (0.98Mpa)
BODY TEST	10.5 kg/cm ² (1.03Mpa)	21 kg/cm ² (2.06Mpa)
SEAT TEST	7.7 kg/cm ² (0.761Mpa)	15.4 kg/cm ² (1.522Mpa)

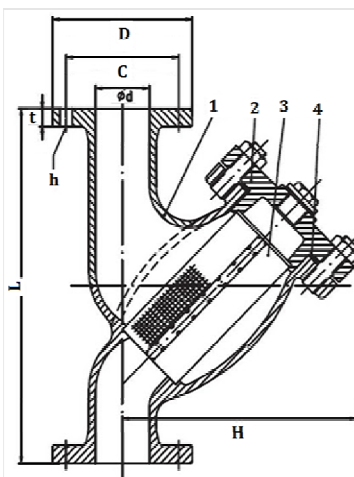

SIZE TABLE

F7220Q BRONZE 5K Y STYPE STRAINER

DN	d	L	D	C	NO	h	t	H
15	25	165	80	60	4	12	9	86
20	25	165	85	65	4	12	10	86
25	25	165	95	75	4	12	10	86
32	40	170	115	90	4	15	12	106
40	40	170	120	95	4	15	12	106
80	80	373	180	145	4	19	18	266

F7220Q BRONZE 10/16K Y STYPE STRAINER

DN	d	L	D	C	NO	h	t	H
15	25	165	95	70	4	12	12	86
20	25	165	100	75	4	15	14	86
25	25	165	125	90	4	19	14	86
32	40	170	135	100	4	19	16	106
40	40	170	140	105	4	19	16	106